


## 技術資料 Technical data


符號 symbol

SJ

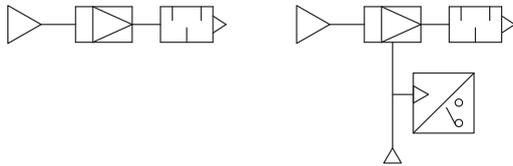

型號 Model	CVA-05	CVA-10	CVA-15	CVA-20	CVA-25	CVA-30
噴嘴直徑 Nozzle dia.	0.5mm	1.0mm	1.5mm	2.0mm	2.5mm	3.0mm
配管外徑尺寸 Port size	G1/8	G1/8	G1/4	G3/8	G3/8	G1/2
使用壓力範圍 Operating pressure range	0.1~0.6MPa(1~6kgf/cm <sup>2</sup> )					
溫度 Ambient temperature	0~60°C					
到達真空度 Final vacuum	-91.8 kPa(-690mmHg)					
使用流體 Medium	壓縮空氣 Air					
吸入流量 Suction flow (l/min)	6	32	63	130	165	230
空氣消耗量 Air consumption (l/min)	13	76	100	185	280	340
供給空氣壓 Supply pressure	0.5 Mpa(5 kgf/cm <sup>2</sup> )					
信號確認設定範圍 Signal setting range (SJ type)	-20.0~-90 kPa(-150~ -680mm Hg)					
給油 Lubrication	不須給油 (Not required)					
重量 weight	88g	84g	126g	294g	323g	395g
型號 Model	CVA-05	CVA-10	CVA-15	CVA-20	CVA-25	CVA-30
重量 weight	96g	110g	158g	321g	358g	410g

# 外觀尺寸圖 Dimensions

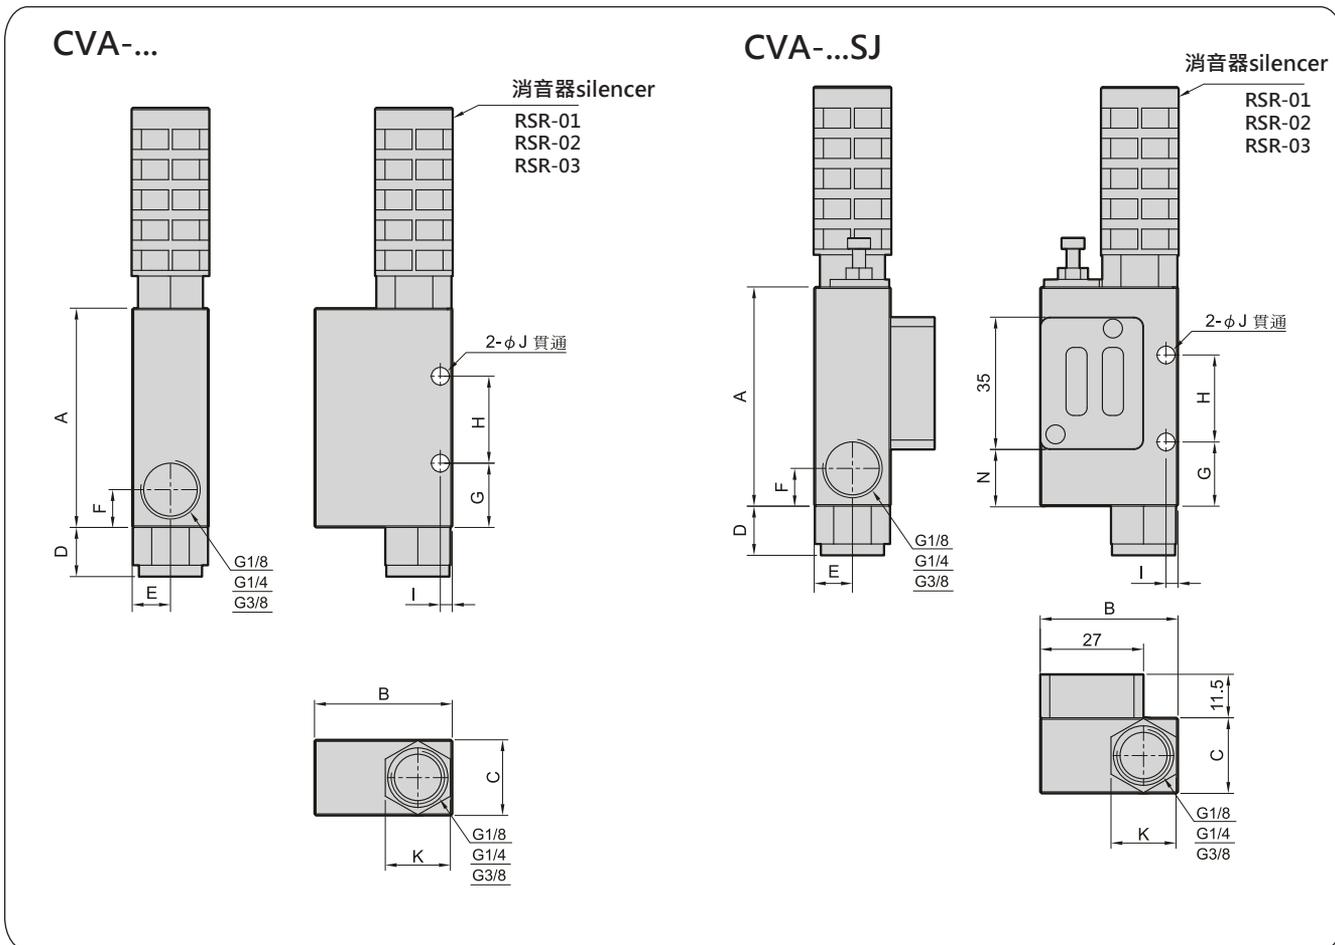

CVA

型號\代號	A	B	C	D	E	F	G	H	I	J	K	N
CVA-05	45	33	16	10	8	10	14	20	4.5	4.2	16	
CVA-05-SJ	45	33	16	10	8	10	14	20	4.5	4.2	16	2
CVA-10	55	34	16	10	7.8	10	13	18	3	4.5	14	
CVA-10-SJ	55	34	16	10	7.8	10	13	18	3	4.5	14	9
CVA-15	58	36	20	13	10	10	17	23	3	4.5	17	
CVA-15-SJ	58	36	20	13	10	10	17	23	3	4.5	17	15
CVA-20	75	43	30	16	15	16	26	27	5.7	5.5	22	
CVA-20-SJ	75	43	30	16	15	16	26	27	5.7	5.5	22	31
CVA-25	100	60	40	17	20	16	20	50	5.5	6	40	30
CVA-25-SJ	100	60	40	17	20	16	20	50	5.5	6	40	30
CVA-30	118	60	40	20	20	20	33	50	5.5	6	40	30
CVA-30-SJ	118	60	40	20	20	20	33	50	5.5	6	40	30

