



技術資料 Technical data

● 介紹及應用 Introduction and application

可與任何 G1/2 外螺紋接口的吸盤直接安裝。
配置2級或者3級真空管，Si真空管可提供高真空流量，Xi真空管可提供高真空度。

It can be installed directly with any suction cup with G1 / 2 male thread interface.
Equipped with level 2 or level 3 vacuum tubes, Si vacuum tubes can provide high vacuum flow, and Xi vacuum tubes can provide high vacuum.


● 結構 Structure

陽極氧化鋁製主體
單根真空發生器
密封件由 NBR 橡膠製成
備選部件：真空表

Anodized aluminum body.
Single vacuum generator.
The seal is made of NBR rubber.
Optional parts: vacuum gauge.

● 訂購代號 How to code

CVY	-	5010	-	SI32	-	2
產品代號 Product code		產品型號 Product number		真空管類型 Vacuum tube type		真空管數量 Number of vacuum tubes
		5010		SI32 XI40		2 3

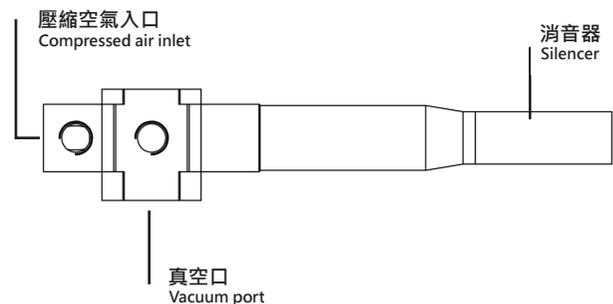

● 標準尺寸資料 Standard size data


CVY-5010-SI32-2
CVY-5010-SI32-3
CVY-5010-XI40-2
CVY-5010-XI40-3

● 技術參數 Technical parameter

型號 type	最大真空度 Maximum vacuum 【%】	最大抽吸能力 Maximum suction capacity 【l/min】	耗氣量 Air consumption 【l/min】	工作壓力 Working pressure 【bar】	自重 Self weight 【g】	工作溫度 Operating temperature 【°C】
CVY-5010-SI32-2	70	192	90	5	190	-10...80
CVY-5010-SI32-3	70	342	90	5	190	-10...80
CVY-5010-XI40-2	91	168	120	5	190	-10...80
CVY-5010-XI40-3	91	372	120	5	190	-10...80

● 外觀尺寸圖 Dimensions

CVY-5

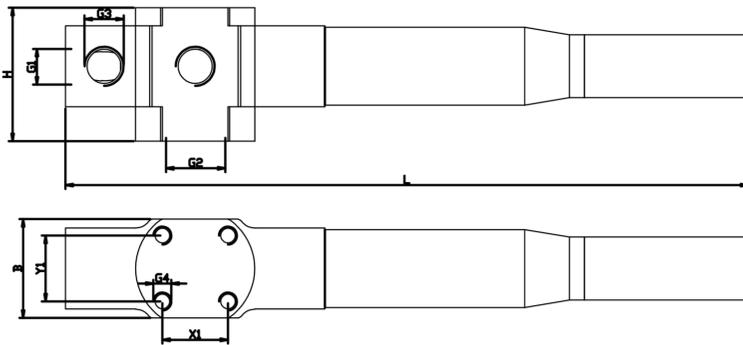

型號 type	尺寸 size mm									
	B	G1	G2	G3	G4	H	L	X1	Y1	
CVY-5010-2	33	G1/4-F	G1/2-F	G1/4-F	M6-F	44.5	173	22	22	
CVY-5010-3	33	G1/4-F	G1/2-F	G1/4-F	M6-F	44.5	229	22	22	

5bar工作壓力下不同真空度對應的真空流量

