

技術資料 Technical data

● 介紹及應用 Introduction and application

真空接頭螺紋為 G2" 1/2。
有多種配置，可定制滿足您具體的需求。
Si真空管可提供高真空流量，Xi真空管可提供高真空度。

The vacuum connector thread is G2 " 1/2.
There are multiple configurations that can be customized to meet your specific needs.
Si vacuum tube can provide high vacuum flow, Xi vacuum tube can provide high vacuum.


● 結構 Structure

陽極氧化鋁製主體
可選用5至16根不等數量的真空發生管
密封件由 NBR 橡膠製成
備選部件：鋁製消音器、真空表

Anodized aluminum body.
Available with 5 to 16 different number of vacuum generating tubes.
The seal is made of NBR rubber
Optional parts: aluminum silencer, vacuum gauge.

● 訂購代號 How to code

CVZ	-	7	-	S32	-	3X5
產品代號 Product code		產品型號 Product number		真空管類型 Vacuum tube type		真空管數量 Number of vacuum tubes
		6		S32 X40		3X5 3X11 3X6 3X12 3X7 3X13 3X8 3X14 3X9 3X15 3X10 3X16

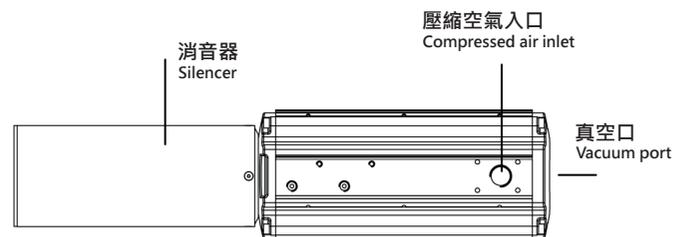

● 標準尺寸資料 Standard size data

CVZ-7-S32-3X5
CVZ-7-S32-3X6
CVZ-7-S32-3X7
CVZ-7-S32-3X8
CVZ-7-S32-3X9
CVZ-7-S32-3X10

CVZ-7-S32-3X11
CVZ-7-S32-3X12
CVZ-7-S32-3X13
CVZ-7-S32-3X14
CVZ-7-S32-3X15
CVZ-7-S32-3X16


CVZ-7-X40-3X5
CVZ-7-X40-3X6
CVZ-7-X40-3X7
CVZ-7-X40-3X8
CVZ-7-X40-3X9
CVZ-7-X40-3X10

CVZ-7-X40-3X11
CVZ-7-X40-3X12
CVZ-7-X40-3X13
CVZ-7-X40-3X14
CVZ-7-X40-3X15
CVZ-7-X40-3X16

● 技術參數 Technical parameter



型號 type	最大真空度 Maximum vacuum 【%】	最大抽吸能力 Maximum suction capacity 【l/min】	耗氣量 Air consumption 【l/min】	工作壓力 Working pressure 【bar】	自重 Weight 【g】	工作溫度 Operating temperature 【°C】
CVZ-7-S32-3X5	70	1710	450	5	4900	-10...80
CVZ-7-S32-3X6	70	2052	540	5	4900	-10...80
CVZ-7-S32-3X7	70	2394	630	5	4900	-10...80
CVZ-7-S32-3X8	70	2736	720	5	4900	-10...80
CVZ-7-S32-3X9	70	3078	810	5	4900	-10...80
CVZ-7-S32-3X10	70	3420	900	5	4900	-10...80
CVZ-7-S32-3X11	70	3762	990	5	4900	-10...80
CVZ-7-S32-3X12	70	4104	1080	5	4900	-10...80
CVZ-7-S32-3X13	70	4446	1170	5	4900	-10...80
CVZ-7-S32-3X14	70	4788	1260	5	4900	-10...80
CVZ-7-S32-3X15	70	5130	1350	5	4900	-10...80
CVZ-7-S32-3X16	70	5472	1440	5	4900	-10...80
CVZ-7-X40-3X5	91	1860	600	5	4900	-10...80
CVZ-7-X40-3X6	91	2232	720	5	4900	-10...80
CVZ-7-X40-3X7	91	2604	840	5	4900	-10...80
CVZ-7-X40-3X8	91	2976	960	5	4900	-10...80
CVZ-7-X40-3X9	91	3348	1080	5	4900	-10...80
CVZ-7-X40-3X10	91	3720	1200	5	4900	-10...80
CVZ-7-X40-3X11	91	4092	1320	5	4900	-10...80
CVZ-7-X40-3X12	91	4464	1440	5	4900	-10...80
CVZ-7-X40-3X13	91	4836	1560	5	4900	-10...80
CVZ-7-X40-3X14	91	5208	1680	5	4900	-10...80
CVZ-7-X40-3X15	91	5580	1800	5	4900	-10...80
CVZ-7-X40-3X16	91	5952	1920	5	4900	-10...80

● 外觀尺寸圖 Dimensions

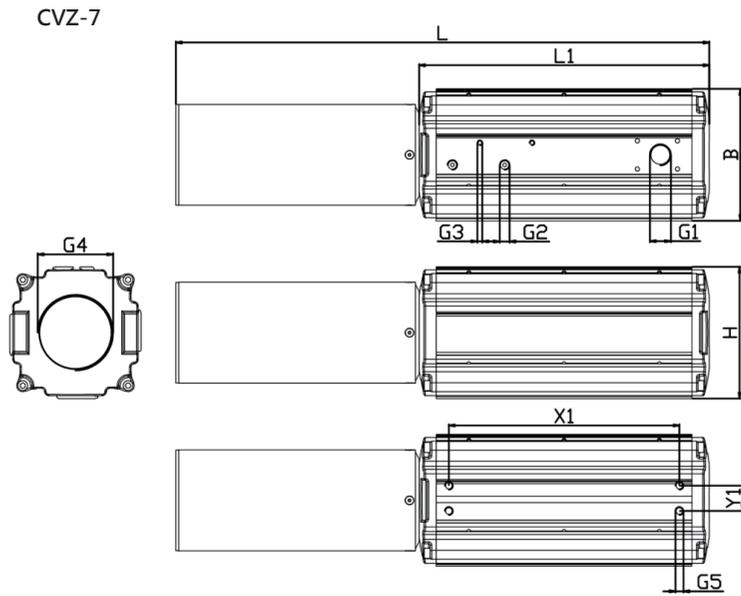

型號 type	尺寸 size mm										
	B	G1	G2	G3	G4	G5	H	L	L1	X1	Y1
CVZ-7	131	G1/2-F	G1/8-F	M5-F	G2-1/2-F	M8-F	131	532	290	230	25

5bar工作壓力下不同真空度對應的真空流量

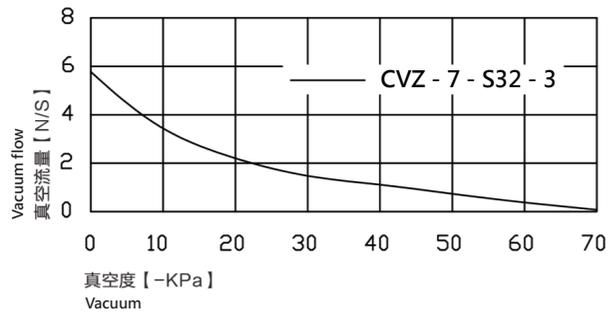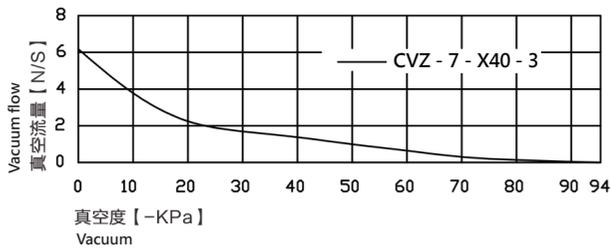

* 單根真空管數值，多根請疊加計算流量。