

技術資料 Technical data

● 介紹及應用 Introduction and application

搬運表面光滑或略微粗糙的平板工件
搬運受壓敏感工件時幾乎無痕跡且抗靜電


Handling flat workpieces with smooth or slightly rough surfaces
When handling pressure-sensitive workpieces, there are almost no traces and antistatic

● 結構 Structure


堅固耐磨的扁平吸盤為單密封唇，由吸盤墊和連接接頭組成

The strong and wear-resistant flat suction cup is a single sealing lip, consisting of a suction cup pad and a connecting joint

● 訂購代號 How to code

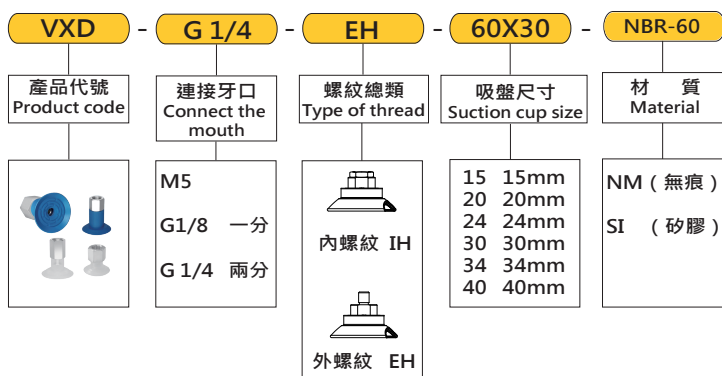

在同一系列的接頭組合中，替換吸墊和接頭可以根據要求組合
In the same series of connector combinations, replacement suction pads and connectors can be combined as required



● 標準尺寸資料 Standard size data

VXD-M5-EH-15(NM無痕)
VXD-G1/8-EH-15(NM無痕)
VXD-G1/8-IH-15(NM無痕)
VXD-M5-EH-20(NM無痕)
VXD-G1/8-EH-20(NM無痕)
VXD-G1/8-IH-20(NM無痕)
VXD-M5-EH-24(NM無痕)
VXD-G1/8-EH-24(NM無痕)

VXD-G1/8-IH-24-NM(無痕)
VXD-G1/8-EH-30-NM(無痕)
VXD-G1/8-IH-30-NM(無痕)
VXD-G1/4-EH-34-NM(無痕)
VXD-G1/4-IH-34-NM(無痕)
VXD-G1/4-EH-40-NM(無痕)
VXD-G1/4-IH-40-NM(無痕)
VXD-G1/8-EH-40-NM(無痕)


VXD-M5-EH-15-SI(矽膠)
VXD-G1/8-EH-15-SI(矽膠)
VXD-G1/8-IH-15-SI(矽膠)
VXD-M5-EH-20-SI(矽膠)
VXD-G1/8-EH-20-SI(矽膠)
VXD-G1/8-IH-20-SI(矽膠)
VXD-M5-EH-24-SI(矽膠)
VXD-G1/8-EH-24-SI(矽膠)

VXD-G1/8-IH-24-SI(矽膠)
VXD-G1/8-EH-30-SI(矽膠)
VXD-G1/8-IH-30-SI(矽膠)
VXD-G1/4-EH-34-SI(矽膠)
VXD-G1/4-IH-34-SI(矽膠)
VXD-G1/4-EH-40-SI(矽膠)
VXD-G1/4-IH-40-SI(矽膠)
VXD-G1/8-EH-40-SI(矽膠)


外觀尺寸圖 Dimensions

VXD


VXD 15 至 40 IH



VXD 15 至 40 EH



VXD 15 至 40



型號 Model	尺寸 Size [mm]							
	dn	Ds	G1	H	LG1	SW1	Z(行程)	
VXD-M5-EH-15	2.5	14.5	M5-M	15.0	5.0	7	0.9	
VXD-G1/8-EH-15	3.5	14.5	G1/8"-M	16.0	7.5	14	0.9	
VXD-G1/8-IH-15	3.5	14.5	G1/8"-F	22.0	8.0	14	0.9	
VXD-M5-EH-20	2.5	20.9	M5-M	15.4	5.0	7	1.5	
VXD-G1/8-EH-20	3.5	20.9	G1/8"-M	16.4	7.5	14	1.5	
VXD-G1/8-IH-20	3.5	20.9	G1/8"-F	22.4	8.0	14	1.5	
VXD-M5-EH-24	2.5	24.4	M5-M	15.8	5.0	7	1.7	
VXD-G1/8-EH-24	3.5	24.4	G1/8"-M	16.8	7.5	14	1.7	
VXD-G1/8-IH-24	3.5	24.4	G1/8"-F	22.8	8.0	14	1.7	
VXD-G1/4-EH-30	5.5	30.6	G1/4"-M	27.2	10.0	17	2.0	
VXD-G1/4-IH-30	5.5	30.6	G1/4"-F	37.2	12.0	17	2.0	
VXD-G1/4-EH-34	5.5	34.5	G1/4"-M	28.0	10.0	17	1.4	
VXD-G1/4-IH-34	5.5	34.5	G1/4"-F	38.0	12.0	17	1.4	
VXD-G1/8-EH-40	5.0	40.5	G1/8"-M	25.6	9.0	17	2.3	
VXD-G1/4-EH-40	5.5	40.5	G1/4"-M	25.6	10.0	17	2.3	
VXD-G1/4-IH-40	5.5	40.5	G1/4"-F	35.6	12.0	17	2.3	

型號 Model	尺寸 Size [mm]						
	d	d2	DK	Ds	H	H2	Z(行程)
VXD15	4.5	3.5	9.0	14.5	10.0	7.2	0.9
VXD20	4.5	3.5	10.5	20.9	10.4	7.1	1.5
VXD24	4.5	3.5	10.0	24.4	10.8	7.3	1.7
VXD30	11.2	6.6	15.6	30.6	22.2	15.7	2.0
VXD34	11.2	5.8	14.8	34.5	23.0	16.8	1.4
VXD40	8.0	5.0	16.0	40.5	20.6	14.5	2.3

型號 Model	吸力 Suction	內部體積 Internal volume	推荐软管直径 Recommended hose diameter	連接部件 Connecting parts
	[N]	[cm ³]	d[mm]	
VXD15	5.5	0.12	2	S016
VXD20	8.5	0.31	2	S016
VXD24	11.0	0.70	4	S016
VXD30	19.0	1.50	4	S033
VXD34	25.0	2.10	4	S033
VXD40	33.0	2.90	4	S035